


ENDS MUST BE FREE OF BURRS
OPTIONAL: MACH. C'SINK

1/4-28 UNF-2B
FULL THD. THRU



30°±2° TYP
BOTH ENDS

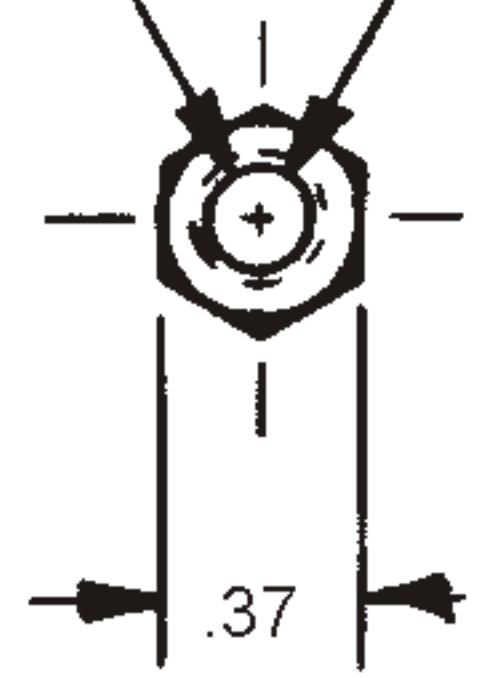