


ENDS MUST BE FREE OF BURRS  
OPTIONAL: MACH. C'SINK.

5/16 - 24 UNF - 2B  
FULL THD. THRU



30°±2° TYP  
BOTH ENDS

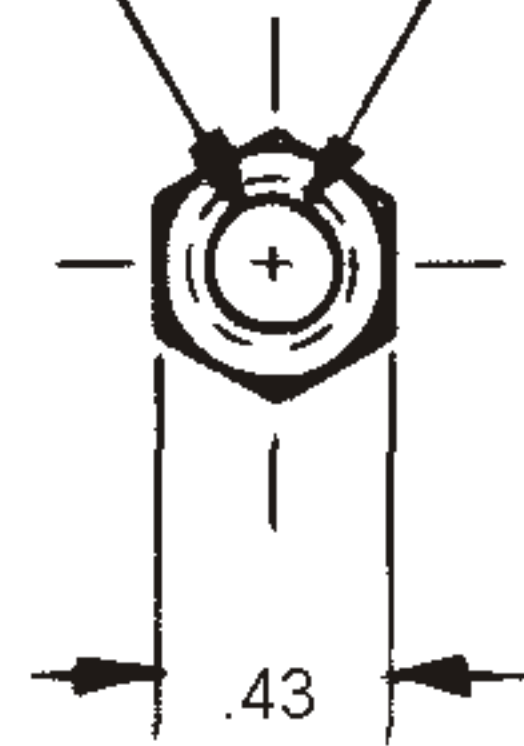